


BOAT DOCK CONFIGURATION

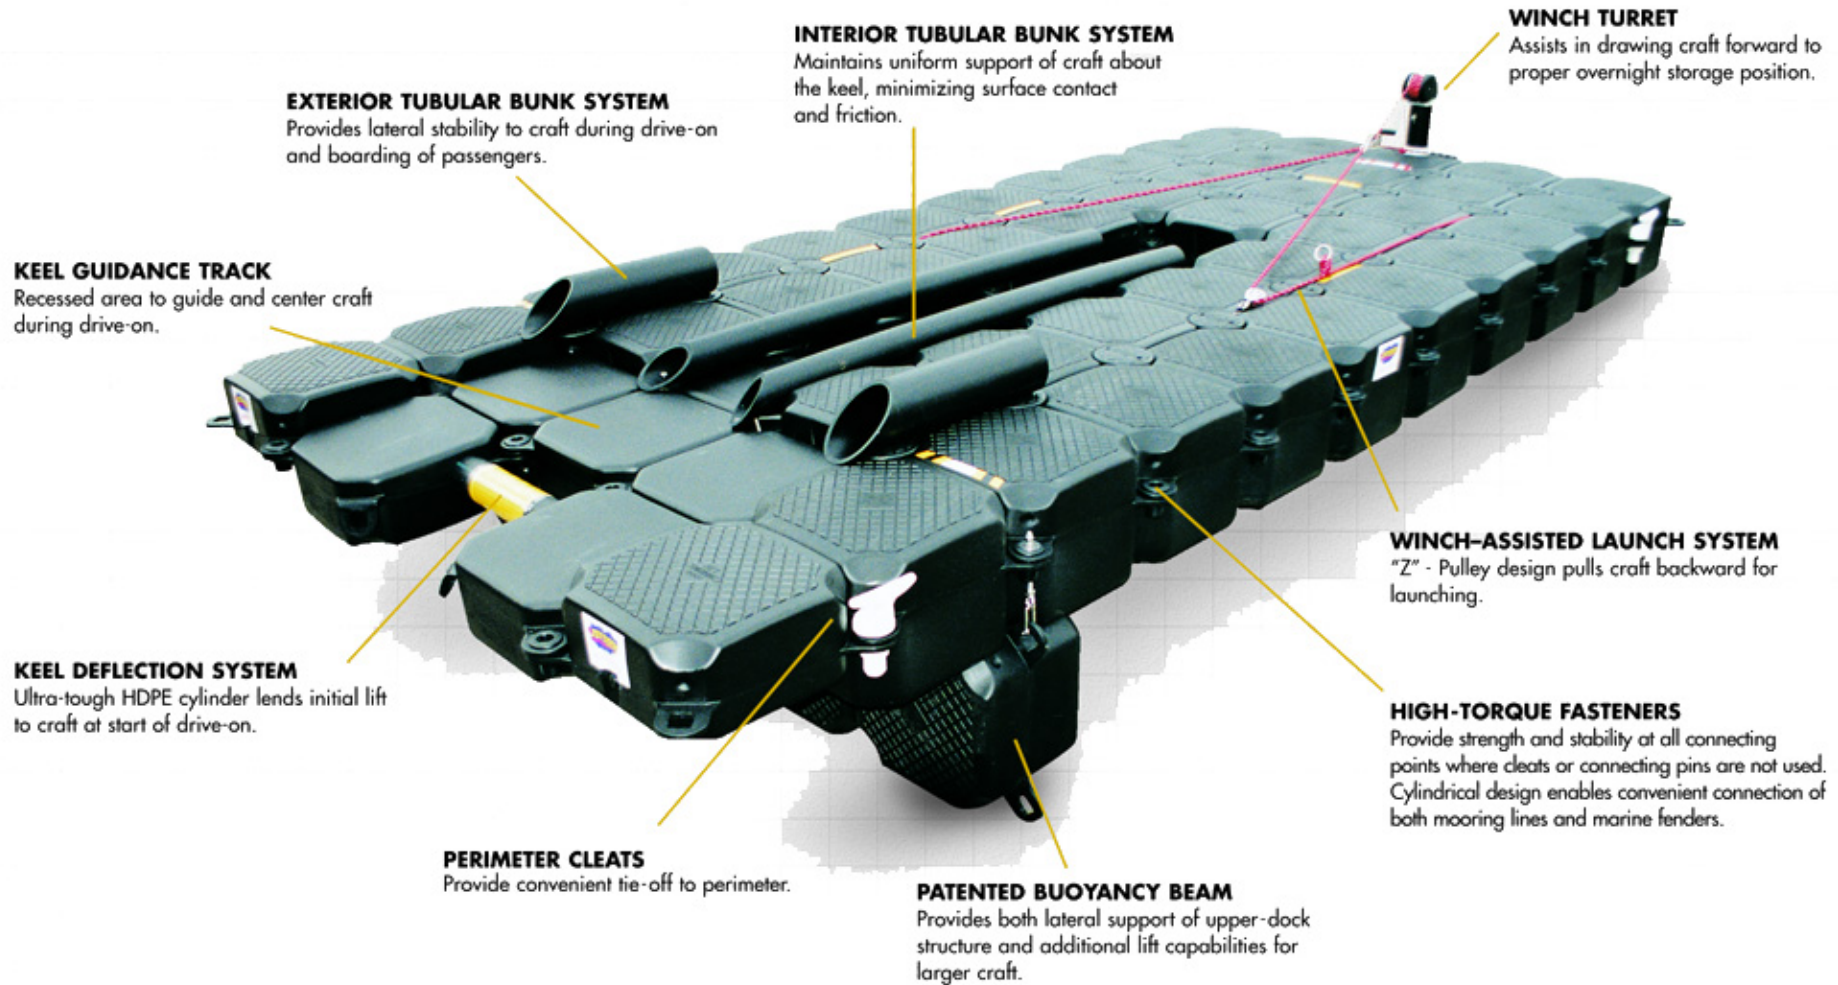

EXTERIOR TUBULAR BUNK SYSTEM
Provides lateral stability to craft during drive-on and boarding of passengers.

KEEL GUIDANCE TRACK
Recessed area to guide and center craft during drive-on.

KEEL DEFLECTION SYSTEM
Ultra-tough HDPE cylinder lends initial lift to craft at start of drive-on.

PERIMETER CLEATS
Provide convenient tie-off to perimeter.

INTERIOR TUBULAR BUNK SYSTEM
Maintains uniform support of craft about the keel, minimizing surface contact and friction.

PATENTED BUOYANCY BEAM
Provides both lateral support of upper-dock structure and additional lift capabilities for larger craft.

WINCH TURRET
Assists in drawing craft forward to proper overnight storage position.

WINCH-ASSISTED LAUNCH SYSTEM "Z"
Pulley design pulls craft backward for launching.

HIGH-TORQUE FASTENERS
Provide strength and stability at all connecting points where cleats or connecting pins are not used. Cylindrical design enables convenient connection of both mooring lines and marine fenders.

All illustrations, photographs and specifications in this catalog are based on the latest product information; some dock parts cannot be shown in certain photographs. Some docks shown with optional equipment. Jet Dock Systems, Inc. reserves the right to make changes at any time without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Availability and delivery time for particular models and equipment combinations may vary. For information on availability, additional options or accessories, contact 1-800-JET-DOCK.