




# **32' TO 50' PERFORMANCE SERIES BOAT DOCK CATALOG**

# 32 FT AND 35 FT BOAT DOCK CONFIGURATIONS

(FOR CRAFT UP TO 30,000 LBS.)

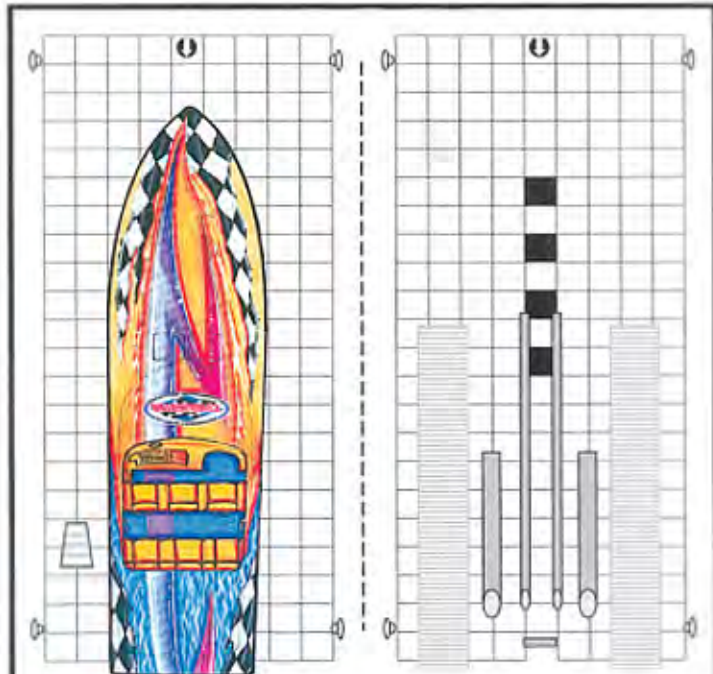


**UNIVERSAL 32ft. Performance Series AquaPad™**  
 Size: 15' wide x 36'8" long  
 Cubes: 193  
 Item No.: D01-22-PD-101

**LEGEND**

- PIVOTING PEDESTAL WINCH
- PERIMETER TIE-OFF CLEAT
- MODULE ASSEMBLY
- PERFORMANCE LIFT SYSTEM
- BOARDING STEPS
- INNER-BUNK
- OUTER-BUNK

\* For calm water locations only  
 \* Minimum 6' depth at stern half of dock required  
 \* Access to electricity needed  
 \* Some cubes may be compromised to facilitate assembly and use.

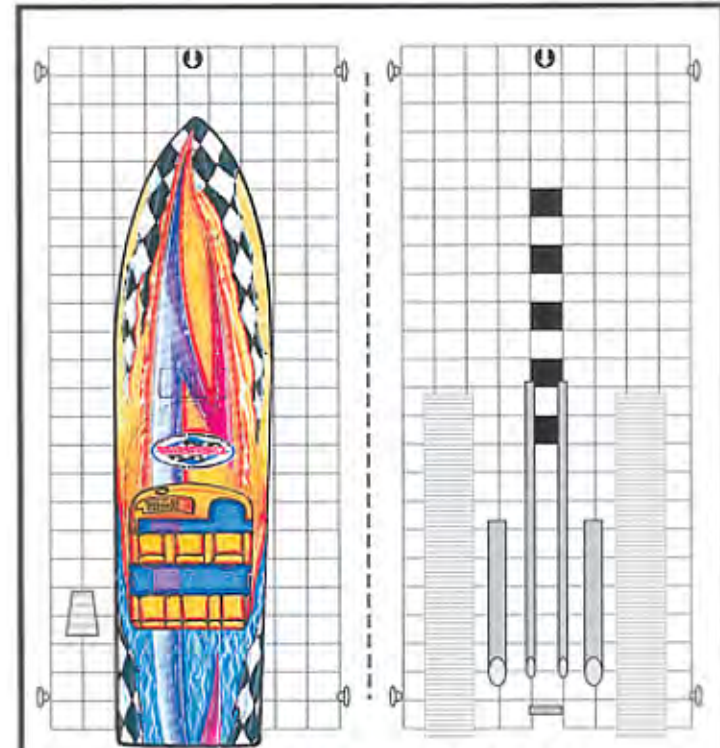

**UNIVERSAL 35ft. Performance Series AquaPad™**  
 Size: 15' wide x 40' long  
 Cubes: 210  
 Item No.: D01-24-PD-101

**STANDARD FEATURES**

- LIFETIME LIMITED WARRANTY
- DURABLE HIGH DENSITY POLYETHYLENE CONSTRUCTION
- PATENTED DRIVE-ON RAMPED DESIGN
- PATENTED, MODULAR, CHANGEABLE CONFIGURATIONS
- NON-SKID SURFACE
- 270° WALK-AROUND SPACE
- BOW RETENTION WINCH TURRET
- PERIMETER TIE-OFF CLEATS
- DRY, SELF-BAILING, WATER-DRAINING DECK
- ADJUSTABLE BUOYANCY
- HDPE TUBULAR BUNK SUPPORT SYSTEM
- HDPE TUBULAR KEEL DEFLECTION SYSTEM
- CUSTOM DRIVE-ON BOW TRACKING SYSTEM
- PATENTED KEEL GUIDANCE SYSTEM
- POWERHEAD


**DRIVE-ON / DRIVE-OFF  
 CONVENIENCE**

**WARNING:** The Jet Dock System and its assembly designs and configurations depicted in these diagrams are protected by U.S. Patents #5,529,013; #5,682,833; #5,931,113; #5,947,050; #6,431,106; #6,526,902 & #6,745,714; Canadian Patent #2,174,705; European Patent #0,837,815 & #1,440,003; and pending United States, Canadian and International patents. For information on licensing and/or patent infringement clarification, please contact Jet Dock Systems, Inc.



# 42 FT AND 50 FT BOAT DOCK CONFIGURATIONS

(FOR CRAFT UPTO 60,000 LBS.)

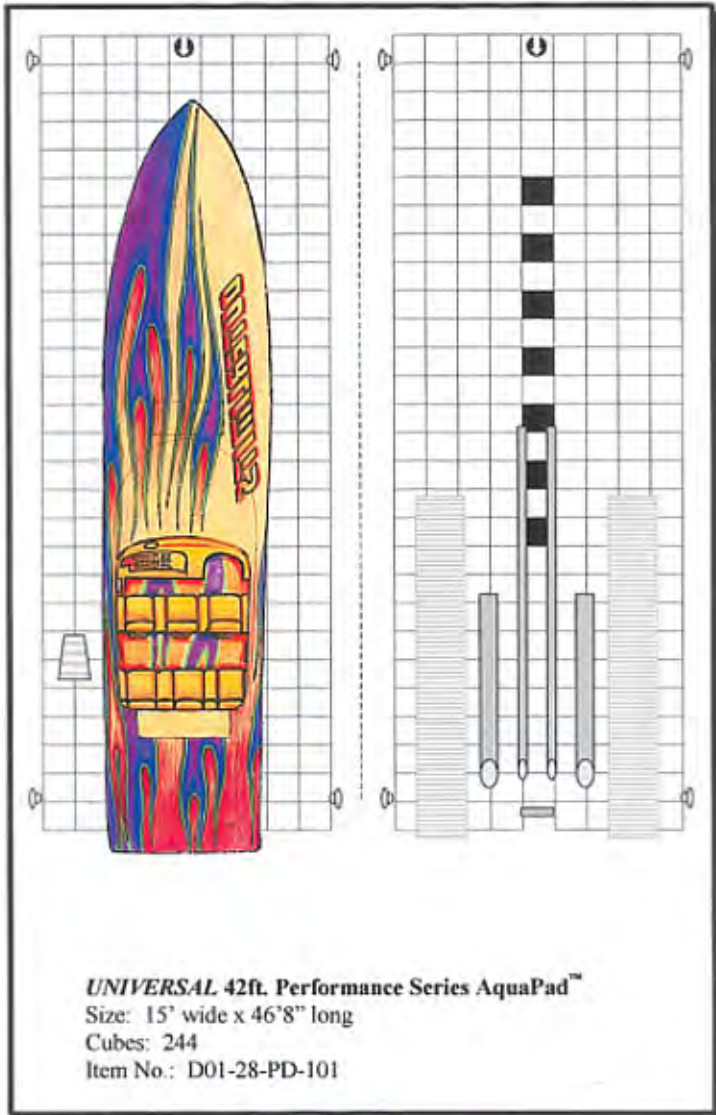


**LEGEND**

- PIVOTING PEDESTAL WINCH
- PERIMETER TIE-OFF CLEAT
- MODULE ASSEMBLY
- PERFORMANCE LIFT SYSTEM
- BOARDING STEPS
- INNER-BUNK
- OUTER-BUNK

\* For calm water locations only  
 \* Minimum 6' depth at stern half of dock required  
 \* Access to electricity needed  
 \* Some cubes may be compromised to facilitate assembly and use.

**STANDARD FEATURES**

- LIFETIME LIMITED WARRANTY
- DURABLE HIGH DENSITY POLYETHYLENE CONSTRUCTION
- PATENTED DRIVE-ON RAMPED DESIGN
- PATENTED, MODULAR, CHANGEABLE CONFIGURATIONS
- NON-SKID SURFACE
- 270° WALK-AROUND SPACE
- BOW RETENTION WINCH TURRET
- PERIMETER TIE-OFF CLEATS
- DRY, SELF-BAILING, WATER-DRAINING DECK
- ADJUSTABLE BUOYANCY
- HDPE TUBULAR BUNK SUPPORT SYSTEM
- HDPE TUBULAR KEEL DEFLECTION SYSTEM
- CUSTOM DRIVE-ON BOW TRACKING SYSTEM
- PATENTED KEEL GUIDANCE SYSTEM
- POWERHEAD

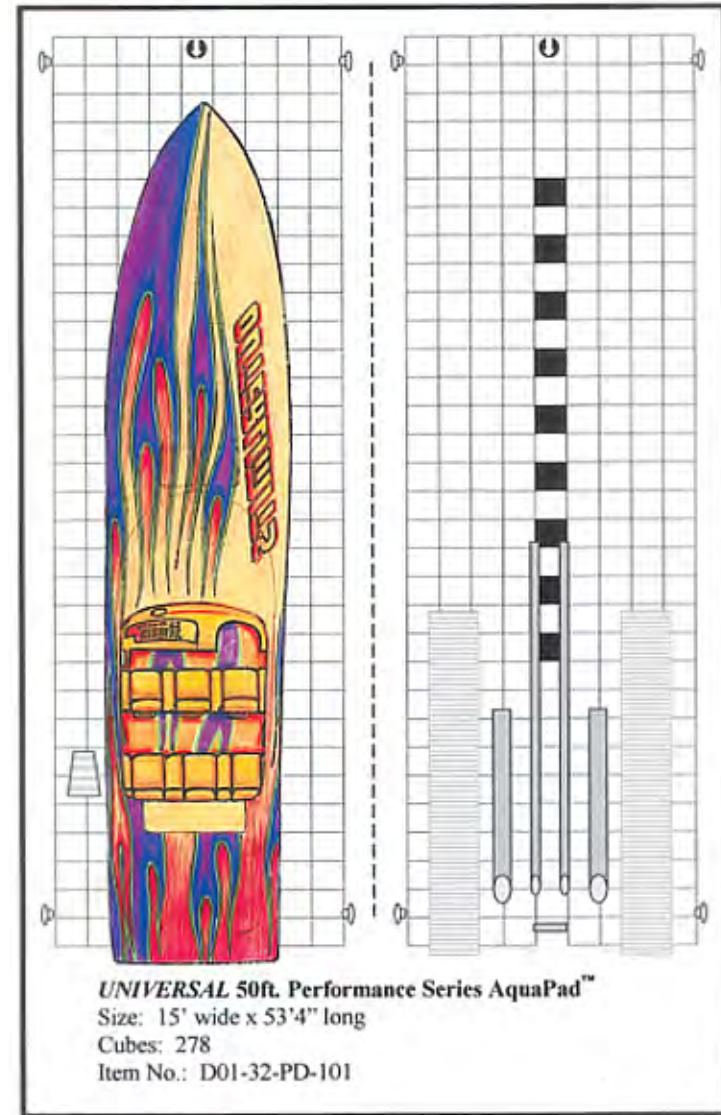

**DRIVE-ON / DRIVE-OFF CONVENIENCE**

**WARNING:** The Jet Dock System and its assembly designs and configurations depicted in these diagrams are protected by U.S. Patents #5,529,013; #5,682,833; #5,931,113; #5,947,050; #6,431,106; #6,526,902 & #6,745,714; Canadian Patent #2,174,705; European Patent #0,837,815 & #1,440,003; and pending United States, Canadian and International patents. For information on licensing and/or patent infringement clarification, please contact Jet Dock Systems, Inc.



# PERFORMANCE SERIES PHOTOS



# PERFORMANCE SERIES MAJOR COMPONENTS



**THE TUBULAR BUNK SYSTEM ON THE DOCK CENTERS THE CRAFT DURING DRIVE-ON AND CRADLES THE CRAFT LIKE THE BUNKS ON A TRAILER.**



**UNDER THE DOCK, A PAIR OF SUBMERGED PONTOONS PROVIDE THE BUOYANCY TO LIFT THE CRAFT AND DRIVES COMPLETELY OUT OF THE WATER.**



**THE POWER HEAD MOUNTED AT THE FRONT OF THE DOCK IS THE CONTROL CENTER FOR THE LIFTING SYSTEM. A SIMPLE SET OF CONTROLS ALLOW YOU TO QUICKLY RAISE AND LOWER THE CRAFT. WITH INDEPENDENT CONTROL OF BOTH THE PORT AND STARBOARD PONTOONS, YOU HAVE TOTAL CONTROL OF THE CRAFTS ATTITUDE ON THE DOCK.**



# PERFORMANCE SERIES MOORING SYSTEMS



**ROUGH WATER MOORING  
USING INTEGRATED PILINGS**



**CALM WATER MOORING  
USING TIDE MANAGER SYSTEM**



**FLOATING DOCK MOORING  
USING IN-DECK CABLE SYSTEM**

**JET DOCK HAS A MOORING OPTION THAT WILL  
MEET ANY SITE REQUIRMENTS.**

# PERFORMANCE SERIES ACCESSORIES




## TIDE LADDER

5-STEP LADDER ALLOWS ACCESS TO THE JET DOCK AT VARYING TIDE LEVELS. FOR DISTANCES OF 5' OR LESS.



## ALUMINUM GANGWAYS

EASIER ACCESS THE JET DOCK AT VARYING TIDE LEVELS, FROM HIGHER STATIONARY STRUCTURES AND WHILE CARRYING GEAR AVAILABLE IN 6' TO 40' LENGTHS.

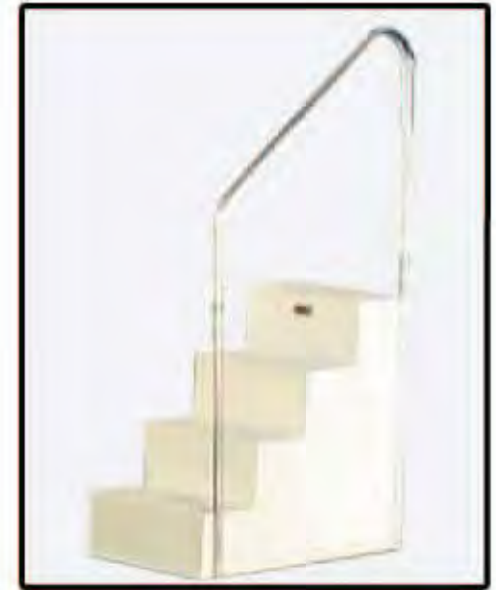

## BOARDING STEPS

EASY ACCESS TO CRAFT FROM THE JET DOCK.



## TOOL KIT

USED TO DISASSEMBLE JET DOCK SECTIONS FOR MAINTENANCE AND MINOR REPAIRS.